

# Backlit Array

Evenly-spaced LEDs mounted onto rigid, reflective, lightweight panels, providing bright, even and efficient illumination.



spanlite


MAKING LIGHT WORK

## LED Backlit Array

An LED backlit array consists of strips of LED, evenly spaced and mounted onto rigid reflective panels such as 3mm white aluminium composite or 2mm white aluminium sheet. These panels are then positioned behind whichever material is being backlit. Each LED is very bright, so a backlit array can typically produce a greater overall brightness than an LED lightsheet – and is also slightly more efficient – although greater depth is required behind the ‘seen surface’ in order to deliver a uniform light distribution. For applications with between 100-250mm available, an LED backlit array should be specified.

An LED backlit array panel is lighter than a corresponding-sized LED lightsheet, and has fewer restrictions on shape and size. This makes them suitable for applications such as large format stretch-fabric ceilings, where weight needs to be considered. And for panel requirements over 3050 x 2030mm, or for odd-shapes, a back-lit array may be preferable.


- ✓ Bright, lightweight and very efficient illumination
- ✓ Emergency lighting compatible
- ✓ Dynamic white and RGBW colour-change options
- ✓ Not restricted to regular shapes
- ✓ Perfect for stretch-fabric ceiling panels
- ✓ Suitable for very large panels

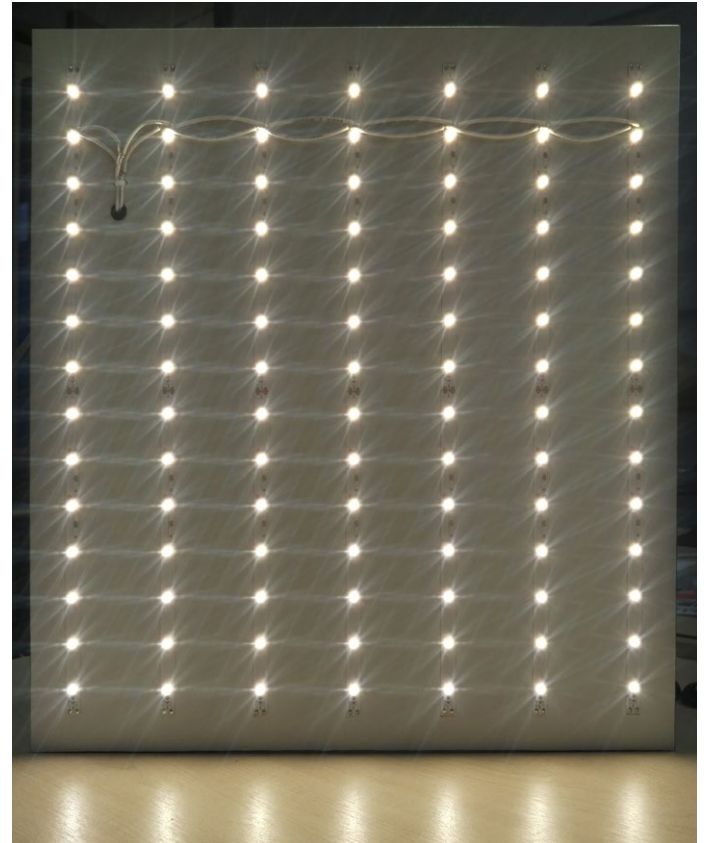

## Panel specifications / options

LED type	OSRAM DURIS E5
Colour temp	2700K, 3000K, 4000K, 5700K, RGBW*
CRI	85 typ
LED driver	1-10, DALI, EM maintained
Cable	3000mm standard
Thickness	5mm typical
Maximum size	3000 x 1500mm single panel
Voltage	24V
Wattage	4.8W typ (8W/m option)
Efficiency	140 lm/watt (3000K)
IP	for indoor use
Lifetime	50,000+ hours
Warranty	2 year/ 5 year optional

\* others on request

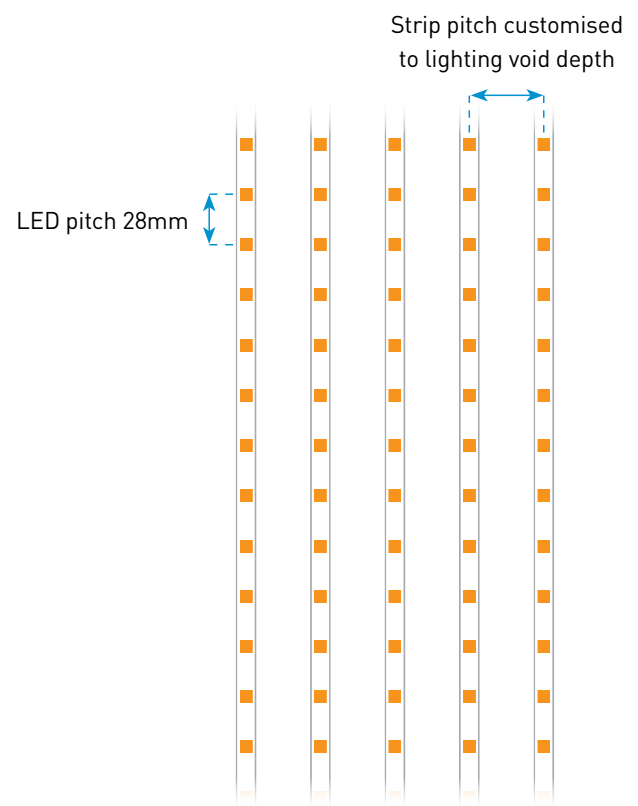

CALL +44 (0)1273 467 586  
 EMAIL [info@spanlite.com](mailto:info@spanlite.com)  
 VISIT [www.spanlite.com](http://www.spanlite.com)

**spanlite**  
 MAKING LIGHT WORK